



Carbon Chain

Grade 30 Proof Coil Chain


A general utility chain for farm, industry and home applications such as; pulling stumps, log chain, cargo lashing, pipe line hanging, tailgate, guard rail, tow and switch chain



Chain embossed "G3" or "G30" every link on size 5/16" and larger.

Grade 30 Specifications

Trade Size Inches	Wire Diameter		Inside Dimensions		Working Load Limit	Wt. per 100 Ft. Lbs.	Ft/Drum	PIN # Self-Colored
	mm	Inches	Length Inches	Width Inches				
3/16	5	.217	.95	.40	800	40	800	0603010001
1/4	7	.274	1.23	.48	1,300	65	800	0803010001
5/16	8	.328	1.28	.48	1,900	95	550	1003010001
3/8	10	.392	1.37	.55	2,650	140	400	1203010001
1/2	13	.509	1.78	.75	4,500	234	200	1603010001
5/8	16	.625	2.01	.85	6,900	375	150	5010813
3/4	20	.781	2.60	1.02	10,600	552	100	5010913
7/8	22	.906	2.66	1.25	12,800	805	75	5011013
1	26	1.031	2.88	1.40	17,900	1025	60	5101113



MATERIAL - Low Carbon Steel

FINISH - Self-Colored, Bright Zinc, Hot Galvanized, and Yellow Polymer *Color Clad*®


ATTACHMENTS - Chain can be supplied with any standard chain attachments such as rings, enlarged links, slip hooks, grab hooks, eye bolts, snaps, and S-hooks

Grade 40 High Test Chain



Chain embossed "G4" or "G40" every link.

Grade 40 Chain features both high tensile strength and resistance to wear needed by modern hauling and heavy duty trucking, farm and construction firms. Working load limits exceed those of Grade 30 Chain.

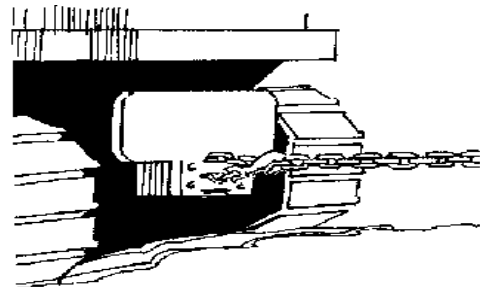

Grade 40 Specifications

Trade Size Inches	Wire Diameter	Inside Dimensions		Working Load Limit	Wt. per 100 Ft. Lbs.	Ft/Drum	PIN # Self-Colored
	Inches	Length Inches	Width Inches				
1/4	.274	1.23	.48	2,600	65	800	0804010001
5/16	.328	1.28	.48	3,900	95	550	1004010001
3/8	.392	1.37	.55	5,400	140	400	1204010001
7/16	.464	1.40	.65	7,200	205	300	1404010001
1/2	.509	1.78	.75	9,200	236	200	1604010001
5/8	.625	2.01	.85	13,000	347	150	2004010001
3/4	.781	2.60	1.02	20,200	552	100	2404010001

MATERIAL - Carbon Steel

FINISH - Self-Colored, Bright (Matte Grey) and Hot Galvanized

ATTACHMENTS - Chain can be supplied in assemblies with any standard chain attachments such as rings, slip hooks, grab hooks, eye bolts, snaps, enlarged links. Chain can also be furnished with special attachments for which detailed prints should be supplied with the inquiry or order.



Grade 70 Transport Chain


Grade 70 Transport Chain is extremely strong for its light weight and is used primarily for load binding in the transportation industry. However, it is also used extensively on farms, in lumbering, towing and construction. Grade 70's high strength to weight ratio is achieved by special heat treating. It resists wear because of its exceptional hardness properties.



Chain embossed "P7" or "P70" every link.

Grade 70 Specifications

Trade Size Inches	Wire Diameter		Inside Dimensions		Working Load Limit	Wt. per 100 Ft. Lbs.	Ft/Drum	PIN # Yellow Dichromate Finish
	Inches	mm	Length Inches	Width Inches				
1/4	.274	7	1.23	.48	3,150	63	800	0807020001
5/16	.334	8	1.12	.48	4,700	100	550	1007020001
3/8	.392	10	1.37	.55	6,600	136	400	1207020001
1/2	.510	13	1.78	.75	11,300	263	200	1607020001

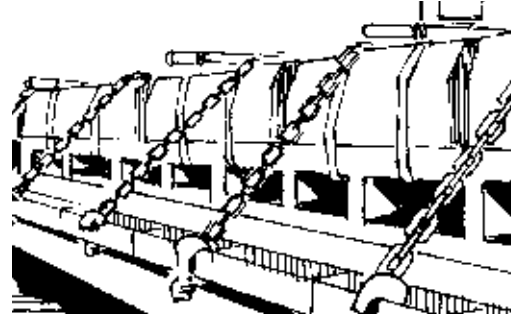

MATERIAL - Carbon Steel

FINISH - Yellow Dichromate

ATTACHMENTS - Chain can be supplied in assemblies with forged clevis grab hooks on each end and other attachments as required.

Machine Chain

Machine Chain is a short link, welded chain for general use where compactness and extra flexibility are desired. It is available in both straight and twist link. It is generally used on tailgates, agricultural implements and industrial equipment.

MATERIAL - Low Carbon Steel

FINISH - Bright Zinc

ATTACHMENTS - Machine Chain can be supplied on assemblies with practically any standard chain attachments for which detailed prints should be furnished with the inquiry or order



Straight Link Machine Chain



Twist Link Machine Chain

Machine Chain Specifications

Trade Size No.	Wire Diameter	Straight Link					Twist Link				
	Inches	Length Inches	Width Inches	Working Load Limit	Wt. per 100 Ft. Lbs.	PIN # Zinc Finish	Length Inches	Width Inches	Working Load Limit	Wt. per 100 Ft. Lbs.	PIN # Zinc Finish
3	.135	.59	.24	270	15	6010332					
2	.148	.63	.27	325	19	6010232	.58	.22	310	20	6010232
1/0	.177	.74	.32	465	27	6011032					
2/0	.192	.78	.35	545	32	6012032	.73	.29	520	34	6022032
4/0	.218	.95	.40	700	42	6014032					
5/0	.250	1.07	.45	925	53	6015032	1.00	.39	880	56	6025032