





## Suspended Personnel Platform

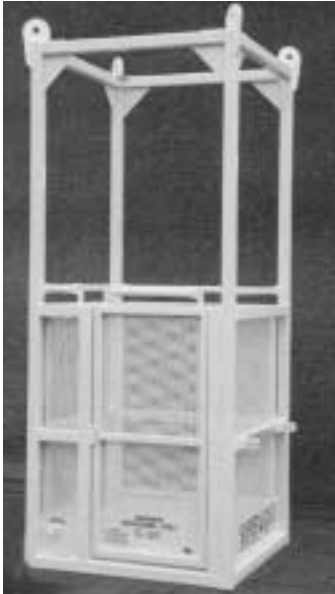

**MODEL S-36**  
36" X 36" X 88"

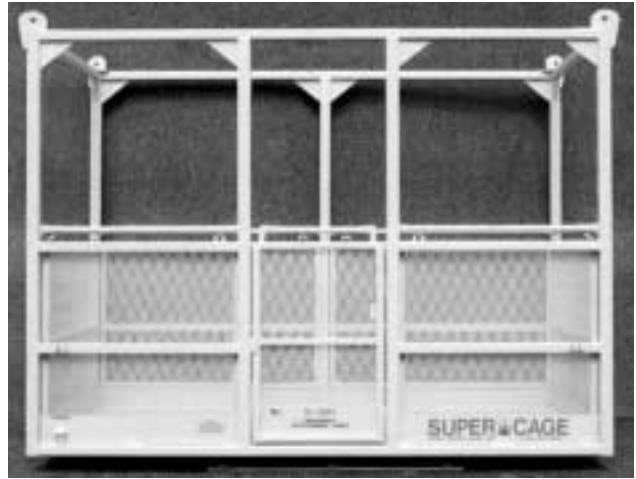

**MODEL S-160**  
48" X 96" X 88"



**MODEL S-100**  
48" X 48" X 88"

Shown with optional expanded metal roof & test weight assembly.



**MODEL S-R7**  
36" O.D. X 88"



# Super Cage™

## Models Available

MODEL	DIMENSIONS			(SWL)* CAPACITY	T.W.** LBS
	L	W	H		
<b>Square/Rectangular Personnel Platform</b>					
S-30	30"	30"	44/88"	500	625
S-36	36"	36"	44/88"	750	938
S-50	36"	48"	44/88"	750	938
S-60	36"	60"	44/88"	750	938
S-75	51.5"	51.5"	44/88"	750	938
S-100	51.5"	51.5"	44/88"	1,000	1,250
S-125	51.5"	58"	44/88"	1,250	1,563
S-150	51.5"	64"	44/88"	1,500	1,875
S-160	51.5"	96"	44/88"	1,500	1,875
S-170	51.5"	108"	44/88"	1,500	1,875
S-200	51.5"	72"	44/88"	2,000	2,500
S-400	72"	144"	44/88"	4,000	5,000
S-1000	84"	84"	96"	10,000	12,500
<b>Round Personnel Platform</b>					
SR5-18	18"	DIA	88"	300	375
SR5-24	24"	DIA	88"	300	375
SR7-36	36"	DIA	88"	500	625
SR7-48	48"	DIA	88"	1,000	1,250

\* SWL - Safe Working Load      \*\* T.W. - Test Weight

MODEL	DIMENSIONS			(SWL)* CAPACITY	T.W.** LBS
	L	W	H		
<b>Direct Fixed Attachment to Boom/Jib</b>					
DFA-30	30"	30"	44"	500	625
DFA-36	36"	36"	44"	750	938
DFA-50	36"	48"	44"	750	938
DFA-60	36"	60"	44"	750	938
DFA-75	51.5"	51.5"	44"	750	938
DFA-100	51.5"	51.5"	44"	1,000	1,250
DFA110	51.5"	60"	44"	1,000	1,250
DFA-125	51.5"	58"	44"	1,250	1,563
DFA-150	51.5"	64"	44"	1,500	1,875
DFA-160	51.5"	96"	44"	1,500	1,875
DFA-170	51.5"	108"	44"	1,500	1,875
DFA-200	51.5"	72"	44"	2,000	2,500
DFA-400	72"	144"	44"	4,000	5,000
DFA-1000	84"	84"	44"	10,000	12,500
<b>Non-Personnel Material Platform</b>					
<b>Non-Personnel Material Platform sizes and capacity</b>					
<b>varies on customer specific needs.</b>					
SNP	varies	varies	varies	varies	N/A

### Other Styles of Personnel Cages are Available

SuperCage™ products can be ordered in any size, shape, or material to meet your specific applications. We also manufacture non-personnel, medical evacuation, and welding equipment SuperCages™. Ask about our SuperCage™ DFA (Direct Fixed Attached) Personnel Platforms (cages) which attach directly to the end of the boom on most cranes. DFA models do not require a bridle assembly or anti-two block device when used in this manner.

### ALL SUPERCAGE™ PRODUCTS WERE DESIGNED TO INCORPORATE THE FOLLOWING AS STANDARD EQUIPMENT:

1. Removeable components for easy maintenance and repairs
2. Construction- high strength steel 2" square tubing
3. Door- inward swing, self-closing, self-latching (with outward stop plate)
4. Grab rail on entire inside perimeter
5. Anchors for personnel safety belts or body harness
6. Toe plate- 6" steel (entire inside perimeter)
7. Expanded metal from floor deck to top of midrail
8. Floor- non slip material
9. Exterior pad eyes for anchoring and tagline use
10. Twelve (12) upper reinforcing gussets at bail area (for added strength)
11. Special warning decals and permanent metal ID plate.
12. High durability paint, safety yellow
13. Operating manual furnished
14. One year manufacturer warranty
15. Fully covered by product liability insurance

### OPTIONS AVAILABLE AT ADDITIONAL COST

1. Easily-detachable test weight assembly for load test procedure
2. 4 or 5 part wire rope lifting attachment (bridle)
3. Protective roof- expanded or solid metal
4. Fixed crosshead with lifting eye (for direct attach to hook)
5. Forklift attachment with safety restraint
6. Rubber bumpers on external perimeter
7. Tool/storage shelf (inside)
8. Video for safe operation
9. Alternate paint colors and finishes

### CAUTION: PLATFORMS ARE TO BE USED ONLY IN COMPLIANCE WITH FEDERAL RULES AND REGULATIONS.

SUPERCAGE™ products are designed, engineered, manufactured, and certified to meet or exceed all existing Federal and State codes, Title 29CR Part 1926.550(g). Crane and Derrick Suspended Personnel Platform. Inspection, load test and certification documents furnished.