




Penco® Stone Handling Slings

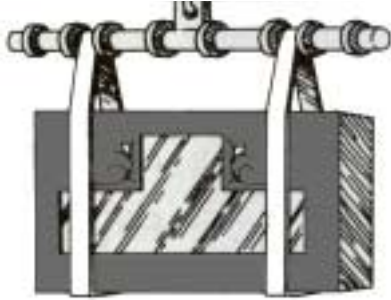


With natural untreated webbing, Penco® Stone Handling Slings are ideally suited for handling polished granite, concrete panels and marble blocks. Available in 4" width only.

Part #	Width	Ply	Vertical	Choker	Basket
STC1-904	4"	1	5,400	4,300	10,800
STC2-904	4"	2	9,700	7,770	19,400
STT1-904	4"	1	5,400	4,300	10,800
STT2-904	4"	2	9,700	7,770	19,400
SEE1-904	4"	1	5,400	4,300	10,800
SEE2-904	4"	2	9,700	7,770	19,400
SEN1-904	4"	1	10,800	8,600	21,600
SEN2-904	4"	2	19,400	15,500	38,800

STC - Triangle Choker STT - Triangle Triangle
SEE - Eye & Eye SEN - Endless

Penco® Cargo Slings

- Designed as a widebody sling where extra width is critical.
- Used only in a basket hitch.
- It provides better balance and load distribution.
Available in widths 6" thru 24".
- Special widebody slings above 24" are available upon request.



Use only in a Basket Hitch

Penco® Standard Duty Cargo Slings

PIN #	Webbing Width In.	Rated Capacity Lbs	Eye Length In.	Eye Width In.
PCS1-906	6	18,600	9	1
PCS1-908	8	25,000	10	1
PCS1-910	10	29,500	12	1
PCS1-912	12	37,200	12	1
PCS1-916	16	44,000	16	2
PCS1-920	20	49,500	20	2
PCS1-924	24	66,000	24	2

Penco® Heavy Duty Cargo Slings

PIN #	Webbing Width In.	Rated Capacity Lbs	Eye Length In.	Eye Width In.
PCS2-906	6	30,350	9	1
PCS2-908	8	42,500	10	1
PCS2-910	10	51,500	12	1
PCS2-912	12	59,300	12	1
PCS2-916	16	66,000	16	2
PCS2-920	20	76,000	20	2
PCS2-924	24	79,000	24	2

Penco® Special Slings

Lumber Sorter Slings

- These slings are used specifically in saw mill operations.
- The sling are fabricated with aluminum or flame cut fitting on one end.
- The other end is a sewn pocket

Lumber Sorter Slings

PIN #	Width	Ply	Rated Capacity
LS1-904	4"	1	12,800 Lbs

Auger Slings

- Designed to quick lift and secure the drilling auger to the truck boom.
- The auger sling, in swift wrap around action, lifts the auger to the boom where it is held securely in travel position.
- The nylon webbing will hang straight from the boom when not in use, will not curl or kink.
- Most common lengths 8'6" - 9'0" - 10'0" - 10'6"
- Rated Capacity: Vertical 2,400 Lbs
Choker 1,900 Lbs.
Basket 4,800 Lbs.



Penco Tufskin® Abrasion Resistant Nylon Slings

Penco Tufskin® Slings are made from Latex Treated Cordura Jacketed Webbing with Red Yarn Innerwear Indicators.

It is the toughest, most abrasive resistant and durable webbing available. It's like having slings with built-in wear pads - resulting in appreciably greater sling life.

TUFKIN® LIGHT DUTY NYLON SLINGS

Type 1 (TC) & Type 2 (TT) Tufskin® Nylon Slings

Ply	Width	TC	TT	Vertical	Choker	Basket
One Ply	2"	TC1-702	TT1-702	2,200	1,650	4,400
	3"	TC1-703	TT1-703	3,150	2,375	6,300
	4"	TC1-704	TT1-704	4,500	3,375	9,000
Two Ply	2"	TC2-702	TT2-702	4,350	3,275	8,700
	3"	TC2-703	TT2-703	6,450	4,850	12,900
	4"	TC2-704	TT2-704	9,200	6,900	18,400

Type 3 (EEF) & Type 4 (EET) Tufskin® Nylon Slings

Ply	Width	EEF	EET	Vertical	Choker	Basket
One Ply	1"	EEF1-701	EET1-701	1,100	825	2,200
	2"	EEF1-702	EET1-702	2,200	1,650	4,400
	3"	EEF1-703	EET1-703	3,150	2,375	6,300
	4"	EEF1-704	EET1-704	4,300	3,225	8,600
Two Ply	1"	EEF2-701	EET2-701	2,200	1,650	4,400
	2"	EEF2-702	EET2-702	4,050	3,050	8,100
	3"	EEF2-703	EET2-703	6,000	4,500	12,000
	4"	EEF2-704	EET2-704	8,150	6,125	16,300

Type 5 (EN) Tufskin® Nylon Slings

Ply	Width	EN	Vertical	Choker	Basket
One Ply	1"	EN1-701	2,200	1,650	4,400
	2"	EN1-702	4,000	3,000	8,000
	3"	EN1-703	5,550	4,175	11,100
	4"	EN1-704	8,150	6,125	16,300
Two Ply	1"	EN2-701	4,000	3,000	8,000
	2"	EN2-702	8,700	6,525	17,400
	3"	EN2-703	10,450	7,850	20,900
	4"	EN2-704	11,900	8,925	23,800

Tufskin® Light Duty Nylon Slings have:

- Visible Single Stripe on the outside of the webbing for easy identification
- Eyes are tapered for 3" & 4" webbing widths in single ply only.

TUFKIN® HEAVY DUTY NYLON SLINGS

Type 1 (TC) & Type 2 (TT) Tufskin® Nylon Slings

Ply	Width	TC	TT	Vertical	Choker	Basket
One Ply	2"	TC1-1302	TT1-1302	4,400	3,300	8,800
	3"	TC1-1303	TT1-1303	6,300	4,750	12,600
	4"	TC1-1304	TT1-1304	9,000	6,750	18,000
Two Ply	2"	TC2-1302	TT2-1302	8,700	6,550	17,400
	3"	TC2-1303	TT2-1303	12,900	9,700	25,800
	4"	TC2-1304	TT2-1304	15,200	11,400	30,400

Type 3 (EEF) & Type 4 (EET) Tufskin® Nylon Slings

Ply	Width	EEF	EET	Vertical	Choker	Basket
One Ply	1"	EEF1-1301	EET1-1301	2,200	1,650	4,400
	2"	EEF1-1302	EET1-1302	4,400	3,300	8,800
	3"	EEF1-1303	EET1-1303	6,300	4,750	12,600
	4"	EEF1-1304	EET1-1304	8,600	6,450	17,200
Two Ply	1"	EEF2-1301	EET2-1301	4,400	3,300	8,800
	2"	EEF2-1302	EET2-1302	8,100	6,100	16,200
	3"	EEF2-1303	EET2-1303	12,000	9,000	24,000
	4"	EEF2-1304	EET2-1304	16,300	12,250	32,600

Type 5 (EN) Tufskin® Nylon Slings

Ply	Width	TC	Vertical	Choker	Basket
One Ply	1"	EN1-1301	4,400	3,300	8,800
	2"	EN1-1302	8,000	6,000	16,000
	3"	EN1-1303	11,100	8,350	22,200
	4"	EN1-1304	16,300	12,250	32,600
Two Ply	1"	EN2-1301	8,000	6,000	16,000
	2"	EN2-1302	17,400	13,050	34,800
	3"	EN2-1303	20,900	15,700	41,800
	4"	EN2-1304	23,800	17,850	47,600

Tufskin® Heavy Duty Nylon Slings have:

- Visible Double Stripes on the outside of the webbing for easy identification
- Heavy Duty Tufskin® Slings are 30% stronger compared with other sling webbing.
- Eyes are not tapered in any webbing widths